


Computer Insta Check-In® Kiosk

Copyrighted RDS Publishing November 2005


Scale: 1/8 : 1

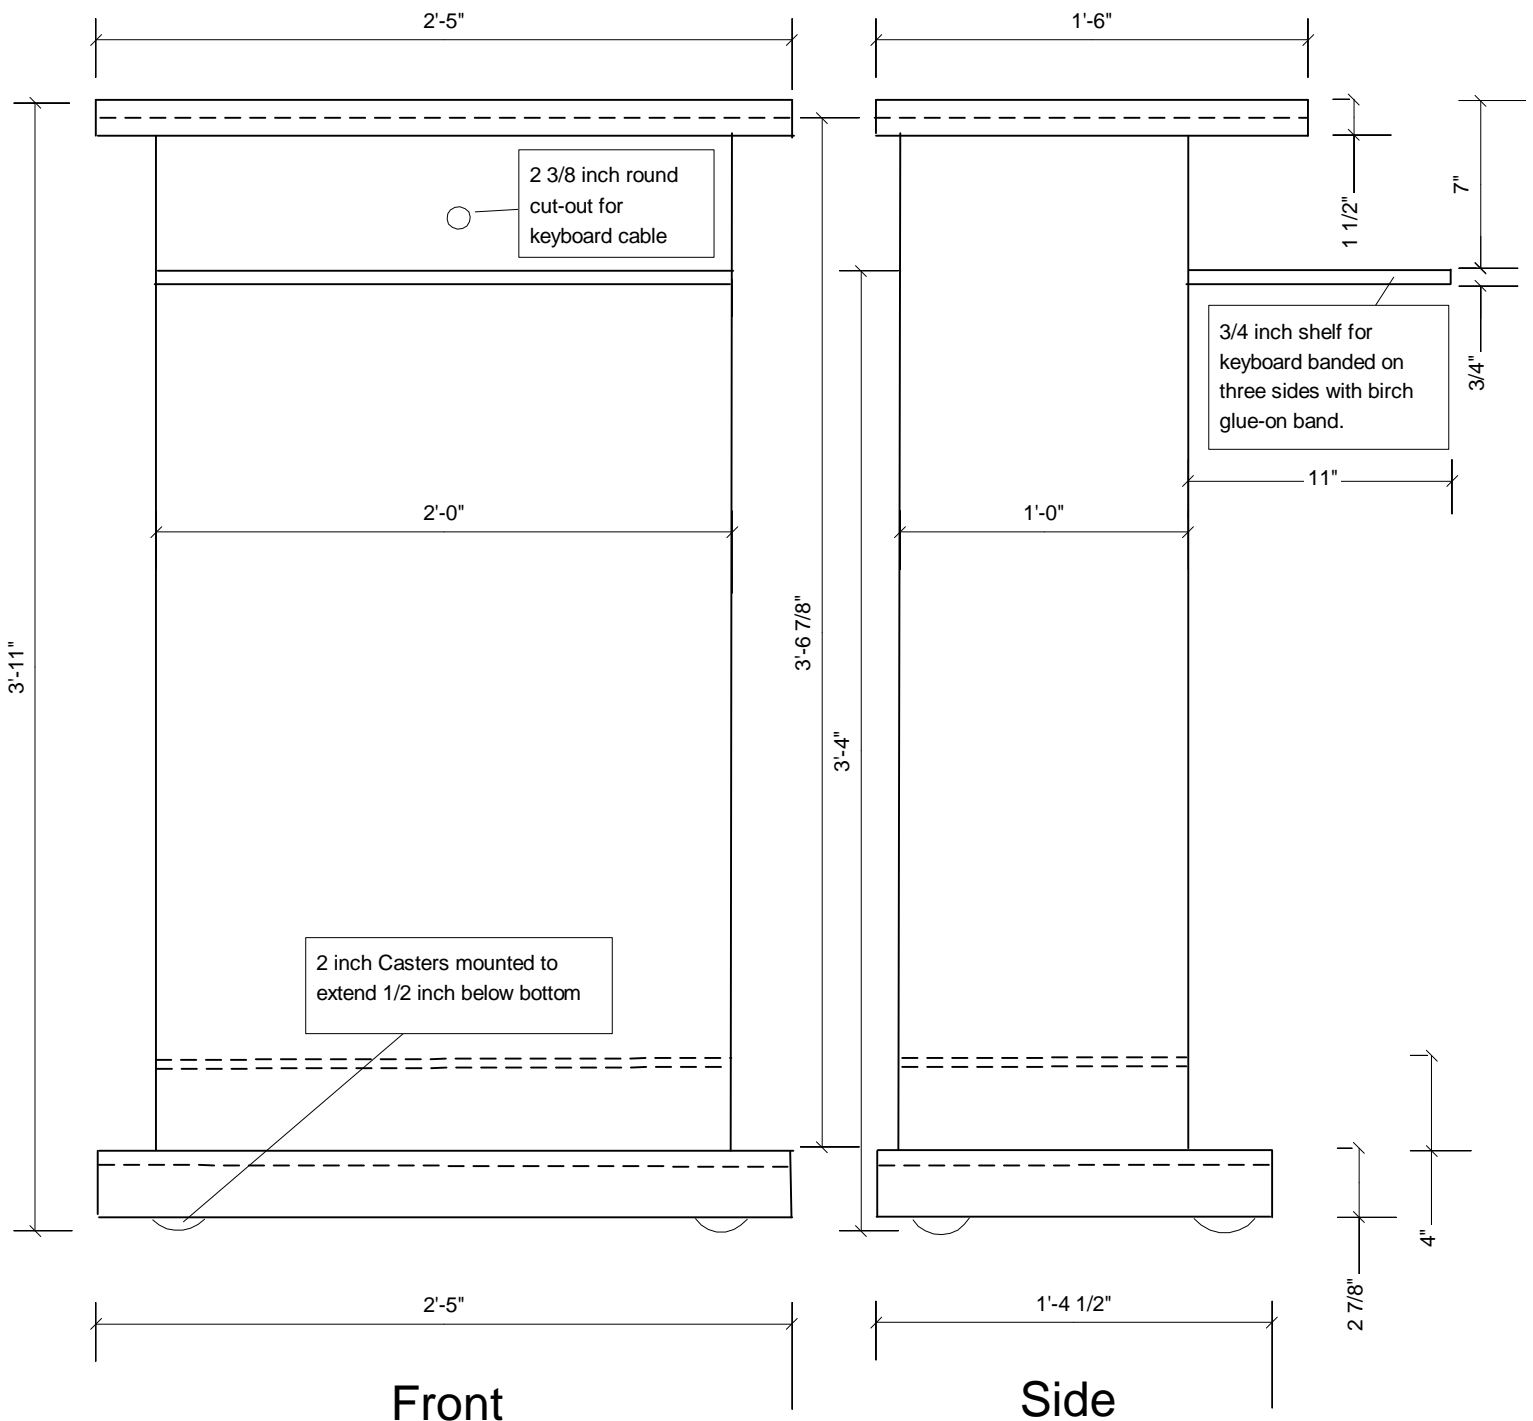

Construction notes:

Joints are mitered and glued, reinforced with RS 1/2" X 1" size biscuits. Optionally, screw four 2 inch casters in corners of bottom so that about 1/2 inch protrudes below bottom.

LCD Monitor, label printer, mouse and optional scanner sit on top. Keyboard on shelf. PC, power strip, and optional wireless gear install inside cabinet. Install cable insert holes in top and front.

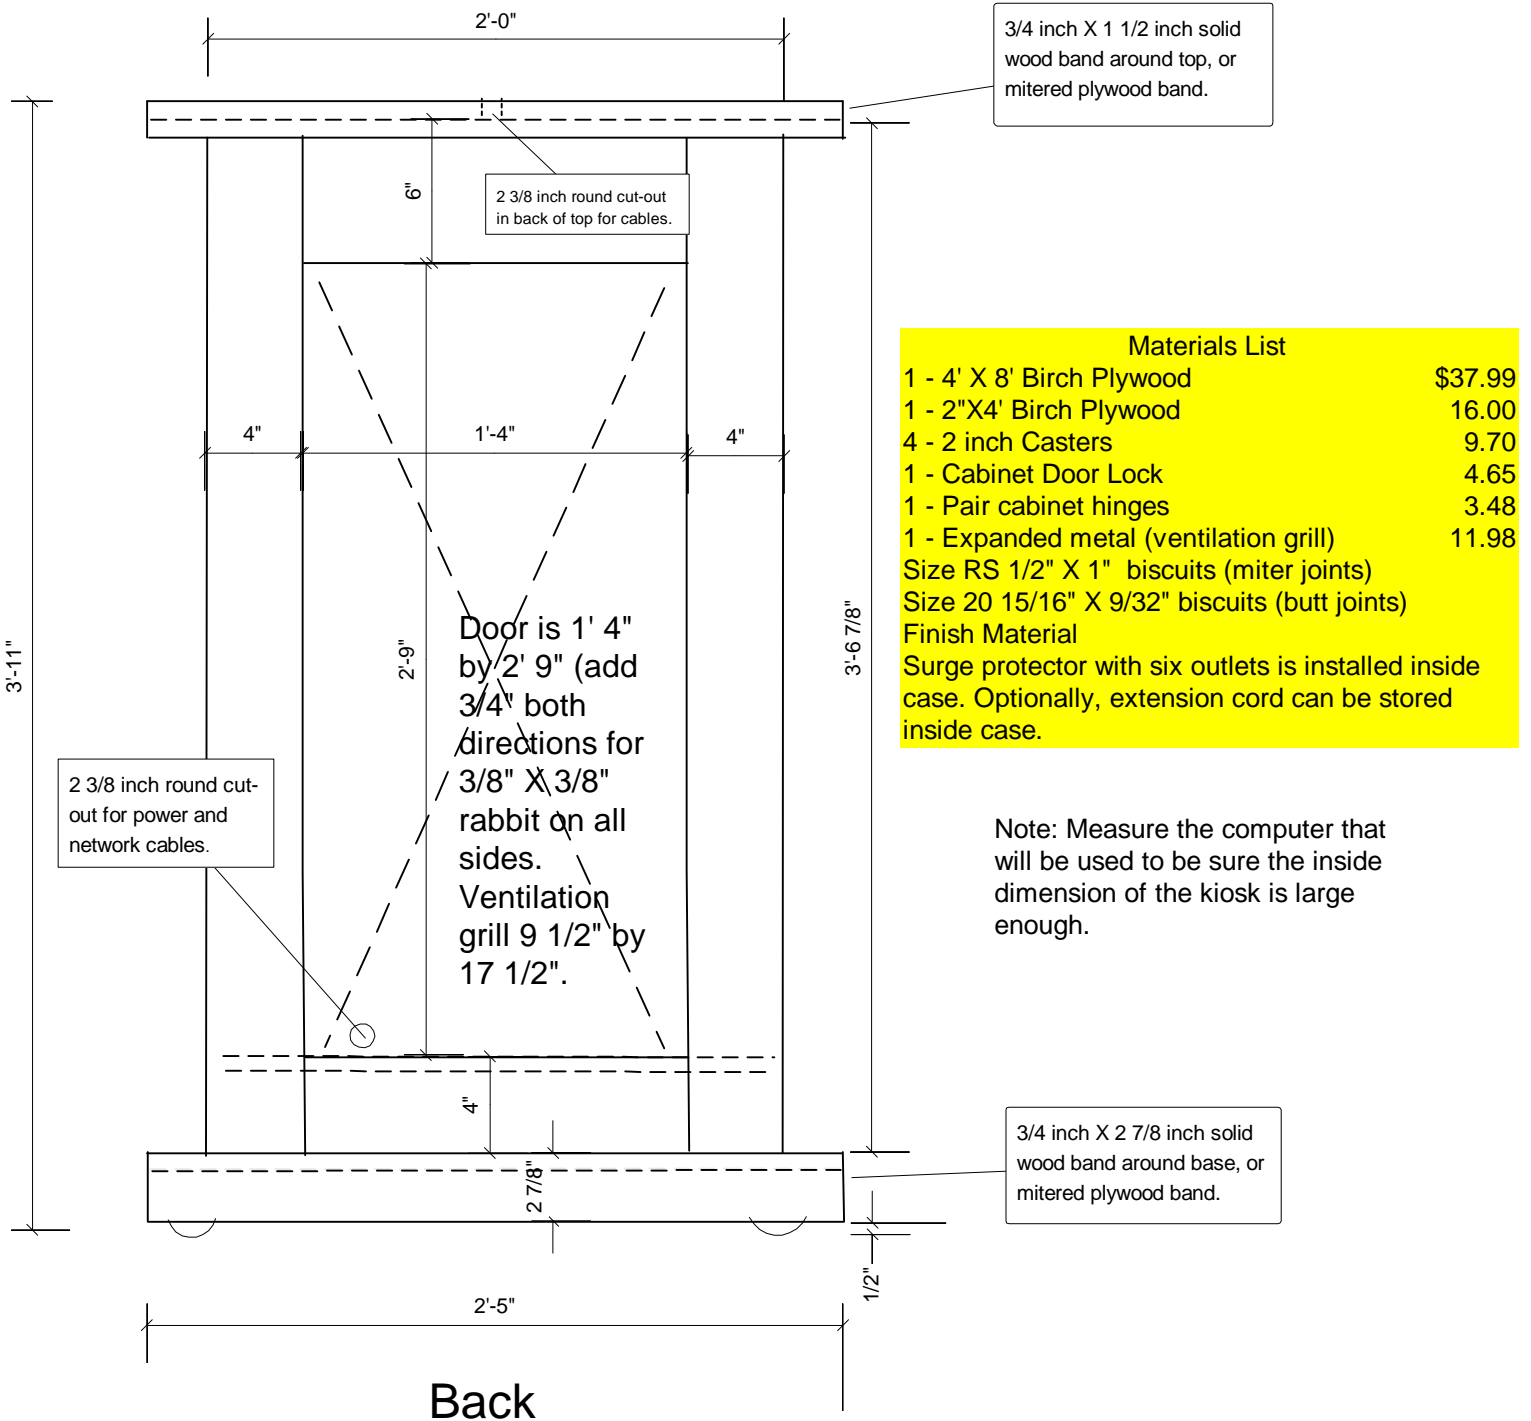

Construction notes:

Install hinged and locked door in back. Door includes metal grid for computer ventilation. In the 2 3/8 inch cut-outs for cables, you can purchase computer cable inserts.

Door constructed of birch plywood frame - 4" sides and 8 3/8" top and bottom, fastened together with size 20 15/16" X 9/32" biscuits (butt joints). Cut 3/8" rabbit around outside edges of door to fit inside of door opening.


Apply finish to suit. This example was stained with Minwax Wood Finish, Ebony 2718. Two coats of tung oil make a good finish.

Standard 2 3/8" diameter cable inserts can be placed in holes for computer cables.


NOTE: If the location of the kiosk is where it will be used primarily by women, it may be desirable to lower the total height by two to four inches, from 3' 11" to 3' 9" or 3' 7".

Material Cutting Layout

4' X 8' Birch Plywood

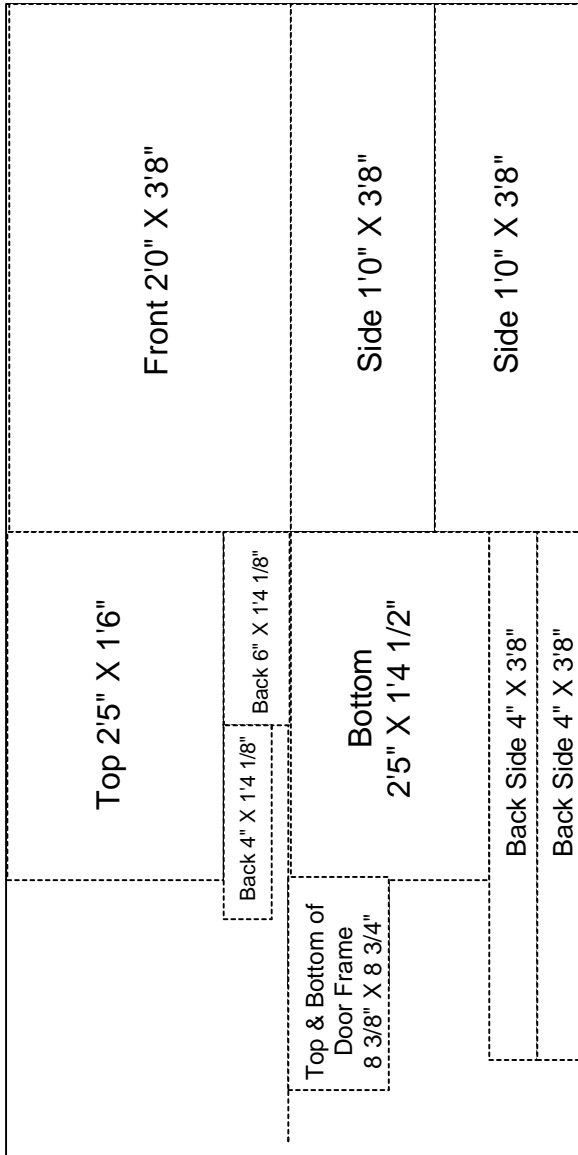

2' X 4' Birch Plywood

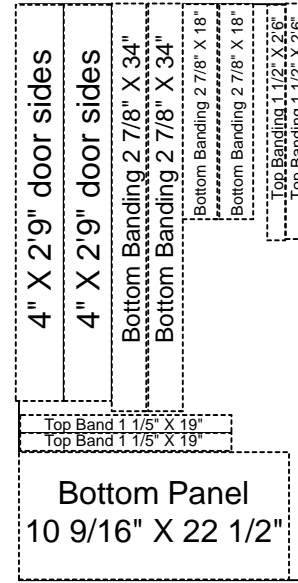



Cable inserts shown in face of cabinet for keyboard (above), for power cable in back (left), and for insert in top of kiosk for monitor and printer.

